Laserliner®

LaserRange-Master i3

Laser distance meter – Simple operating techniques

Rev.0116

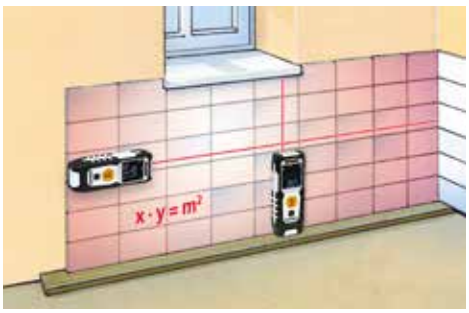

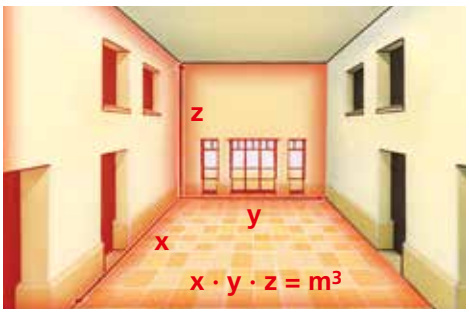

- **Point-precise measuring with laser** to determine lengths exactly
- **The area and volume functions** permit the acquisition of room sizes, for example to calculate material quantities
- **Measuring accuracy** up to 30 m: ± 2 mm*
- **Inside measurement range: 0,3 m to 30 m**
- **2 selectable measurement reference points:** front and rear
- **Min/Max function** to determine diagonals, verticals and horizontals
- Illuminated 2-line **VTN display**
- **Small, compact design** – fits in any toolbox
- Sturdy, ergonomically designed, **rubberised** casing

TECHNICAL DATA
ACCURACY ± 2 mm (typical)*
MEASUREMENT RANGE **max. 30 m**
MINIMAL RANGE 0,3 m
LASER Class 2 < 1mW
LASER WAVELENGTH 635 nm
OPERATING TEMPERATURE -10°C … 40°C
STORAGE TEMPERATURE -20°C … 70°C
UNIT m
AUTOMATIC SWITCH-OFF 30 sec laser / 3 min device
FUNCTIONS distances, areas, volumes, min/max/duration measurement
POWER SUPPLY Batteries 2 x 1,5 V type AAA
DIMENSIONS (W x H x D) 40 x 110 x 24 mm
WEIGHT with batteries 90 g

* See operating instructions for specific accuracies

Illuminated VTN display

Small, compact design

Protective rubber casing

LaserRange-Master i3
inclusive softbag
+ batteries (2 x 1,5 V type AAA)

Packaging dimension (W x H x D)
–

ARTICLE	ARTICLE NO	EAN-CODE	PU
LaserRange-Master i3	080.830A	4 021563 694204	5

Laser 635 nm · 2 · SPEED SHUTTER · 2x AAA · SOFT

UMAREX GmbH & Co. KG · Donnerfeld 2 · 59757 Arnsberg · Germany · Tel. +49 2932 638-300 · Fax +49 2932 638-333 · laserliner@umarex.de · www.laserliner.com